

Torlon® 4203L

polyamide-imide

Torlon® 4203L is an unreinforced, lubricated, pigmented grade of polyamide-imide (PAI) resin. It has the best impact resistance and greatest elongation of all the Torlon® grades. Torlon® PAI has the highest strength and stiffness of any thermoplastic up to 275°C (525°F). It has outstanding resistance to wear, creep, and chemicals.

Torlon® 4203L resin offers outstanding electrical properties, which makes it ideal for high performance parts such as

connectors, switches and relays. In addition Torlon® 4203L polyamide-imide can be used in applications such as thrust washers, spline liners, valve seats, bushings, bearings, wear rings, cams and other applications requiring strength at high temperature and resistance to wear.

- High Flow: Torlon® 4203L-HF
- Low Flow: Torlon® 4203L-LF

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Additive	• PTFE Lubricant		
Features	• Ductile • Fatigue Resistant • Flame Retardant • Good Chemical Resistance	• Good Creep Resistance • Good Electrical Properties • Good Wear Resistance • High Heat Resistance	• High Temperature Strength • Low Temperature Toughness • Ultra High Impact Resistance
Uses	• Aircraft Applications • Automotive Applications • Bushings • Connectors	• Electrical Parts • Electrical/Electronic Applications • Fasteners • Film	• Machine/Mechanical Parts • Oil/Gas Applications • Semiconductor Molding Compounds • Thrust Washer
RoHS Compliance	• RoHS Compliant		
Automotive Specifications	• ASTM D4000 PAI000 R03 A56316 GA140 Z1Z2Z3Z4Z5Z6, Dwg YC3P-7E195-AA • CHRYSLER MS-DB-405 CPN3373 Color: Natural		
Forms	• Pellets		
Processing Method	• Injection Molding	• Machining	• Profile Extrusion

Physical

	Typical Value	Unit	Test method
Specific Gravity	1.42		ASTM D792
Molding Shrinkage - Flow	0.60 to 0.85	%	ASTM D955
Water Absorption (24 hr)	0.33	%	ASTM D570

Mechanical

	Typical Value	Unit	Test method
Tensile Modulus			
-- ¹	4480	MPa	ASTM D638
--	4900	MPa	ASTM D1708
Tensile Strength ¹	152	MPa	ASTM D638
Tensile Stress	192	MPa	ASTM D1708
Tensile Elongation			
Break ¹	7.6	%	ASTM D638
Break	15	%	ASTM D1708

Torlon® 4203L

polyamide-imide

Mechanical	Typical Value	Unit	Test method
Flexural Modulus			ASTM D790
23°C	5030	MPa	
232°C	3590	MPa	
Flexural Strength			ASTM D790
23°C	241	MPa	
232°C	118	MPa	
Compressive Modulus	4000	MPa	ASTM D695
Compressive Strength	221	MPa	ASTM D695
Poisson's Ratio	0.45		ASTM E132


Impact	Typical Value	Unit	Test method
Notched Izod Impact	140	J/m	ASTM D256
Unnotched Izod Impact	1100	J/m	ASTM D4812

Thermal	Typical Value	Unit	Test method
Deflection Temperature Under Load			ASTM D648
1.8 MPa, Unannealed	278	°C	
Glass Transition Temperature ²	277	°C	DSC
CLTE - Flow	3.1E-5	cm/cm/°C	ASTM E831
Thermal Conductivity	0.26	W/m/K	ASTM C177


Electrical	Typical Value	Unit	Test method
Surface Resistivity	5.0E+18	ohm	ASTM D257
Volume Resistivity	2.0E+17	ohm·cm	ASTM D257
Dielectric Strength	23	kV/mm	ASTM D149
Dielectric Constant			ASTM D150
60 Hz	4.20		
1 MHz	3.90		
Dissipation Factor			ASTM D150
60 Hz	0.026		
1 MHz	0.031		

Injection	Typical Value	Unit
Drying Temperature	177	°C
Drying Time	3.0	hr
Suggested Max Moisture	0.050	%
Rear Temperature	304	°C
Nozzle Temperature	371	°C
Mold Temperature	199 to 216	°C
Back Pressure	6.89	MPa
Screw Speed	50 to 100	rpm
Screw L/D Ratio	18.0:1.0 to 24.0:1.0	

Isothermal Stress vs. Strain (ISO 11403-1)

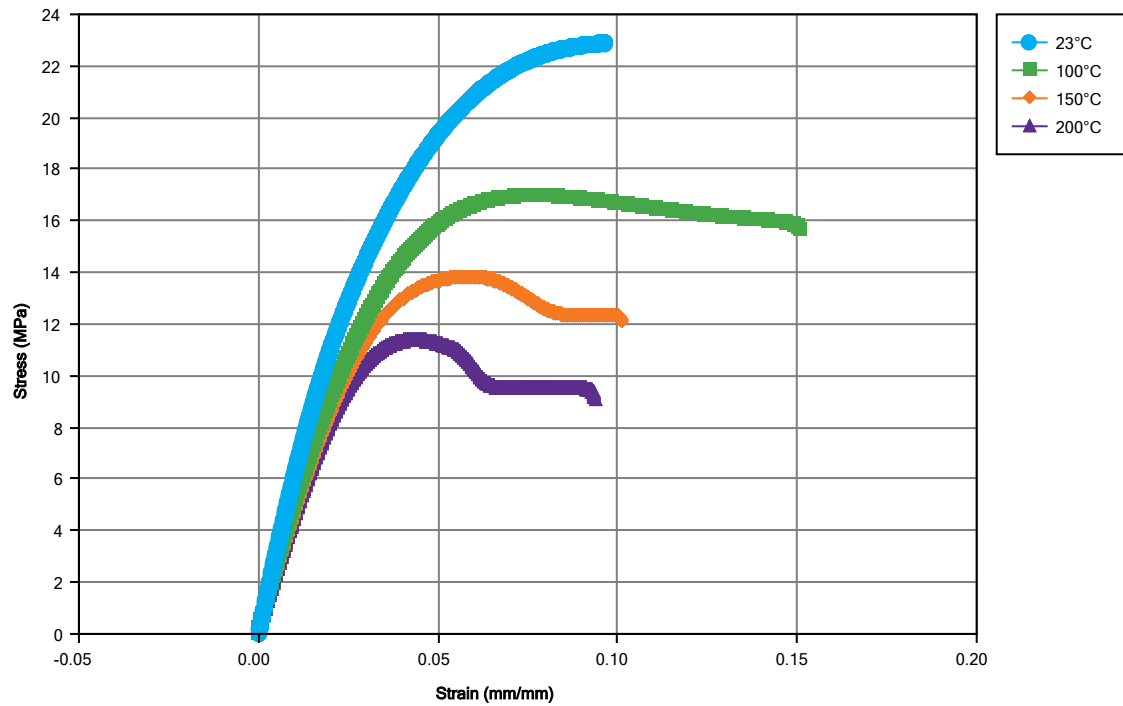

Viscosity vs. Shear Rate (ISO 11403-2)

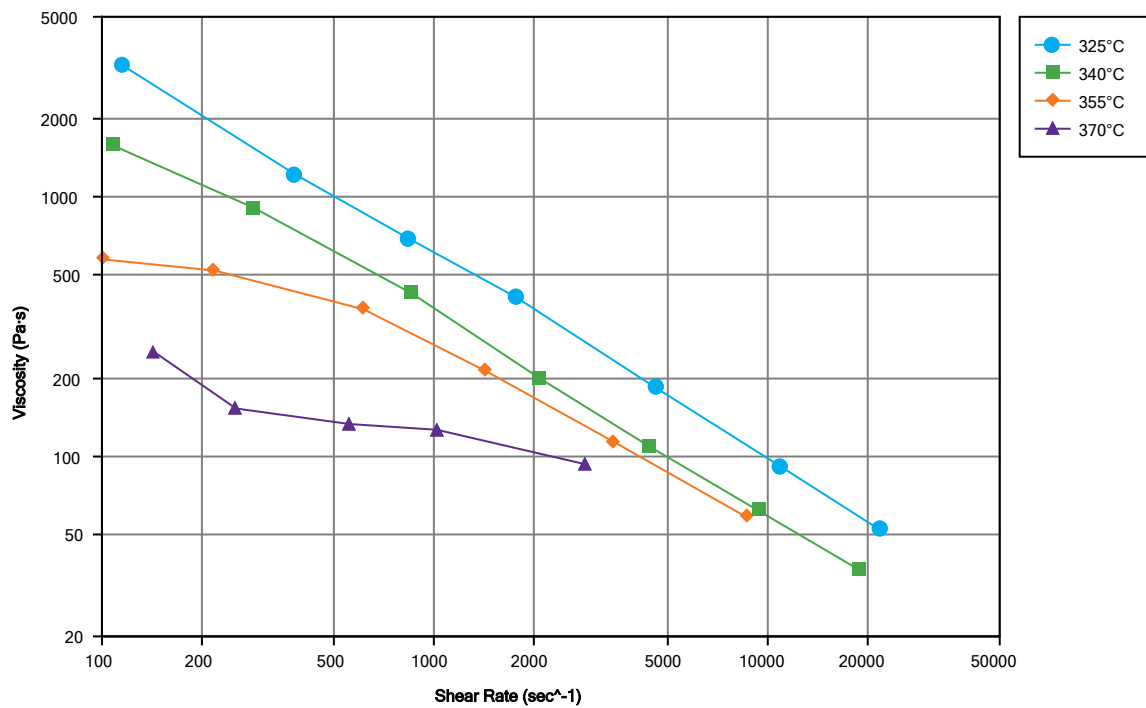

Torlon® 4203L

polyamide-imide

Notes

Typical properties: these are not to be construed as specifications.

¹ Type I

² Tg, onset, Solvay method, 2nd heat. Method is equivalent to ISO 11357-2.

www.solvay.com

SpecialtyPolymers.EMEA@solvay.com | Europe, Middle East and Africa

SpecialtyPolymers.Americas@solvay.com | Americas

SpecialtyPolymers.Asia@solvay.com | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2015 Solvay Specialty Polymers. All rights reserved.

